


- Type:** Single Point
- Material:** Stainless Steel
- Protection:** IP 68
- Features:** Suggested Platform
Size: 350 x 350 mm
- Application:** Bench Scales
Multi Head Weighers
Check Weighers




Specifications:

Capacity	kg	6 / 12 / 30 / 60
Accuracy Class		C3
Max. Number of Verification Intervals	n_{max}	3000
Minimum Load cell Verification Interval	V_{min}	$E_{max}/15000$
Temperature Effect on Zero	%FS/10°C	$\leq \pm 0.019$
Temperature Effect on Sensitivity	%FS/10°C	$\leq \pm 0.011$
Combined Error	%FS	$\leq \pm 0.020$
Creep	%FS	$\leq \pm 0.016$
Output Sensitivity	mv/v	2.0 ± 0.2
Input Resistance	Ω	400 ± 20
Output Resistance	Ω	350 ± 3.5
Insulation Resistance	M Ω	≥ 5000
Zero Balance	%FS	2.0
Temperature, Compensated	°C	-10 ~ +40
Temperature, Operating	°C	-30 ~ +70
Excitation, Recommended	v	5 ~ 12(DC)
Safe Overload	%FS	120
Ultimate Overload	%FS	150
Standard Cable Length	m	6

Dimensions:

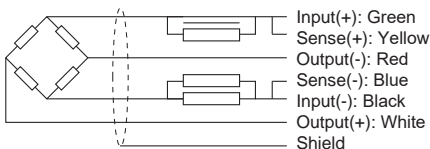

CAP.(kg)	6	12	30	60
A	18.5	18.5	18.5	23.5

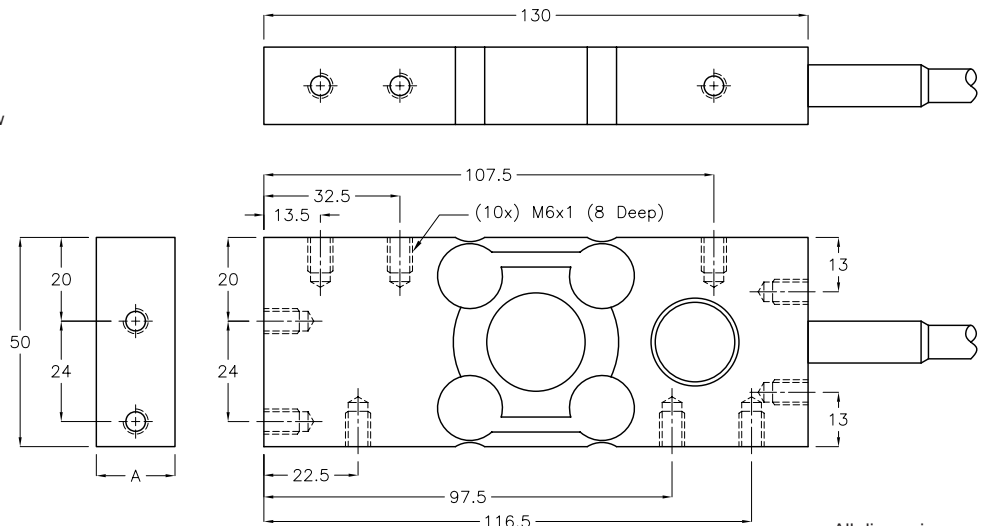

All dimensions: mm.